
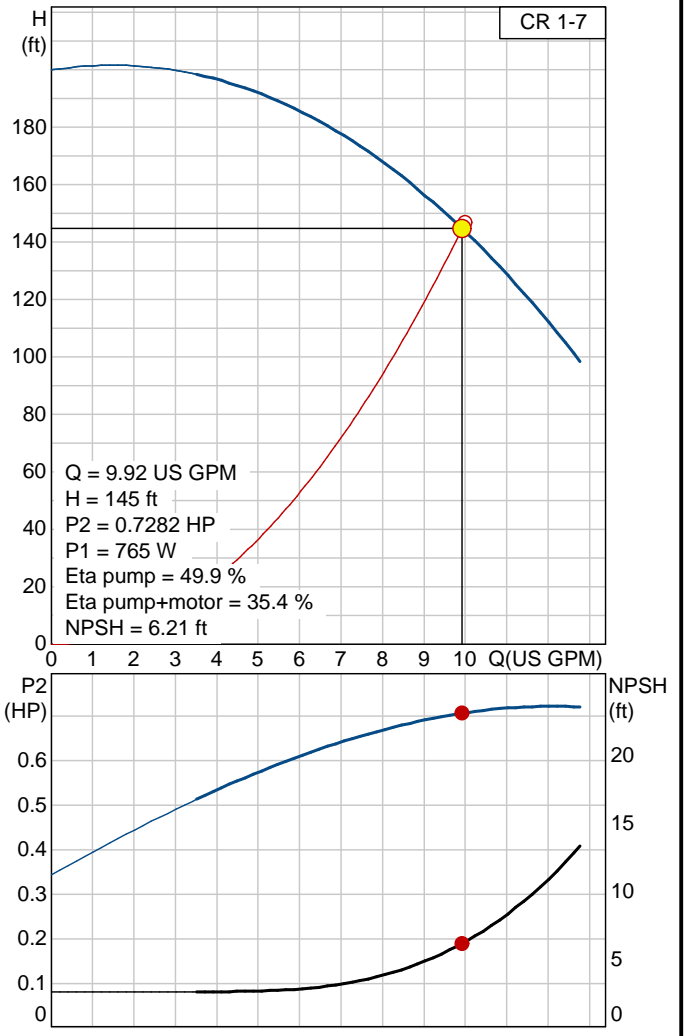


Position	Qty.	Description	Single Price
	1	<p>CR 1-7 Product No.: 96082121 Vertical, non-self-priming, multistage, in-line, centrifugal pump for installation in pipe systems and mounting on a foundation.</p> <p>The pump has the following characteristics:</p> <ul style="list-style-type: none"> - Impellers and intermediate chambers are made of Stainless steel DIN W.-Nr. 1.4301 DIN W.-Nr.. - Pump head and base are made of Cast iron. - The shaft seal has assembly length according to DIN 24960. - Power transmission is via cast iron split coupling. - Pipework connection is via ANSI flanges. <p>The motor is a 3-phase AC motor.</p> <p>Liquid: Liquid temperature range: -4 .. 248 °F</p> <p>Technical: Speed for pump data: 3450 rpm Rated flow: 9.686 US GPM Rated head: 145 ft Type of shaft seal: HQQE</p> <p>Materials: Material, pump housing: Cast iron EN-JL1030 DIN W.-Nr. 25 B ASTM Material, impeller: Stainless steel 1.4301 DIN W.-Nr. 304 AISI</p> <p>Installation: Maximum ambient temperature: 104 °F Max pressure at stated temp: 363 / 250 psi / °F Standard, pipe connection: ANSI Size, pipe connection: 1 1/4" Pressure stage, pipe connec.: Class 300 Flange size for motor: 56C</p> <p>Electrical data: Motor type: 3413M Number of poles: 2 P2 : 0.75 HP Power (P2) required by pump: 0.75 HP 0.75 HP Mains frequency: 60 Hz Rated voltage: 3 x 208-230 / 460 V Service factor: 1,25 Rated current: 2,70-2,60 / 1.3 A Rated speed: 3450 rpm Insulation class (IEC 85): F</p> <p>Others: Net weight: 60.6 lb Gross weight: 66.2 lb Shipping volume: 1.77 ft³</p>	Price on request



Position	Qty.	Description	Single Price
	1	<p data-bbox="292 157 373 184">CR 1-7</p>  <p data-bbox="678 583 1209 611">Note! Product picture may differ from actual product</p> <p data-bbox="292 640 803 751">Product No.: 96082121 Vertical, non-self-priming, multistage, in-line, centrifugal pump for installation in pipe systems and mounting on a foundation.</p> <p data-bbox="292 777 795 804">The pump has the following characteristics:</p> <ul data-bbox="332 810 901 1031" style="list-style-type: none"> - Impellers and intermediate chambers are made of Stainless steel DIN W.-Nr. 1.4301 DIN W.-Nr.. - Pump head and base are made of Cast iron. - The shaft seal has assembly length according to DIN 24960. - Power transmission is via cast iron split coupling. - Pipework connection is via ANSI flanges. <p data-bbox="292 1060 657 1087">The motor is a 3-phase AC motor.</p> <p data-bbox="292 1113 381 1140">Liquid:</p> <p data-bbox="292 1146 771 1173">Liquid temperature range: -4 .. 248 °F</p> <p data-bbox="292 1199 414 1226">Technical:</p> <p data-bbox="292 1232 820 1339">Speed for pump data: 3450 rpm Rated flow: 9.686 US GPM Rated head: 145 ft Type of shaft seal: HQQE</p> <p data-bbox="292 1365 406 1392">Materials:</p> <p data-bbox="292 1398 901 1480">Material, pump housing: Cast iron EN-JL1030 DIN W.-Nr. 25 B ASTM</p> <p data-bbox="292 1486 852 1568">Material, impeller: Stainless steel 1.4301 DIN W.-Nr. 304 AISI</p> <p data-bbox="292 1593 430 1621">Installation:</p> <p data-bbox="292 1627 836 1791">Maximum ambient temperature: 104 °F Max pressure at stated temp: 363 / 250 psi / °F Standard, pipe connection: ANSI Size, pipe connection: 1 1/4" Pressure stage, pipe connec.: Class 300 Flange size for motor: 56C</p> <p data-bbox="292 1816 462 1843">Electrical data:</p> <p data-bbox="292 1850 738 1957">Motor type: 3413M Number of poles: 2 P2 : 0.75 HP Power (P2) required by pump: 0.75 HP</p>	Price on request

Position	Qty.	Description	Single Price
		<p>0.75 HP</p> <p>Mains frequency: 60 Hz</p> <p>Rated voltage: 3 x 208-230 / 460 V</p> <p>Service factor: 1,25</p> <p>Rated current: 2,70-2,60 / 1.3 A</p> <p>Rated speed: 3450 rpm</p> <p>Insulation class (IEC 85): F</p> <p>Others:</p> <p>Net weight: 60.6 lb</p> <p>Gross weight: 66.2 lb</p> <p>Shipping volume: 1.77 ft³</p>	


Description	Value
Product name:	CR 1-7
Product No:	96082121
EAN number:	5700395168594
Technical:	
Speed for pump data:	3450 rpm
Rated flow:	9.686 US GPM
Rated head:	145 ft
Impellers:	7
Type of shaft seal:	HQQE
Stages:	7
Pump version:	U
Model:	A
Cooling:	TEFC
Materials:	
Material, pump housing:	Cast iron EN-JL1030 DIN W.-Nr. 25 B ASTM
Material, impeller:	Stainless steel 1.4301 DIN W.-Nr. 304 AISI
Material code:	A
Code for rubber:	E
Installation:	
Maximum ambient temperature:	104 °F
Max pressure at stated temp:	363 / 250 psi / °F
Standard, pipe connection:	ANSI
Connect code:	FGJ
Size, pipe connection:	1 1/4"
Pressure stage, pipe connec.:	Class 300
Flange size for motor:	56C
Liquid:	
Liquid temperature range:	-4 .. 248 °F
Electrical data:	
Motor type:	3413M
Number of poles:	2
P2:	0.75 HP
Power (P2) required by pump:	0.75 HP 0.75 HP
Mains frequency:	60 Hz
Rated voltage:	3 x 208-230 / 460 V
Service factor:	1,25
Rated current:	2,70-2,60 / 1.3 A
Rated speed:	3450 rpm
Insulation class (IEC 85):	F
Motor protec:	NONE
Motor No:	84Z04002
Others:	
Net weight:	60.6 lb
Gross weight:	66.2 lb
Shipping volume:	1.77 ft³



96082121 CR 1-7

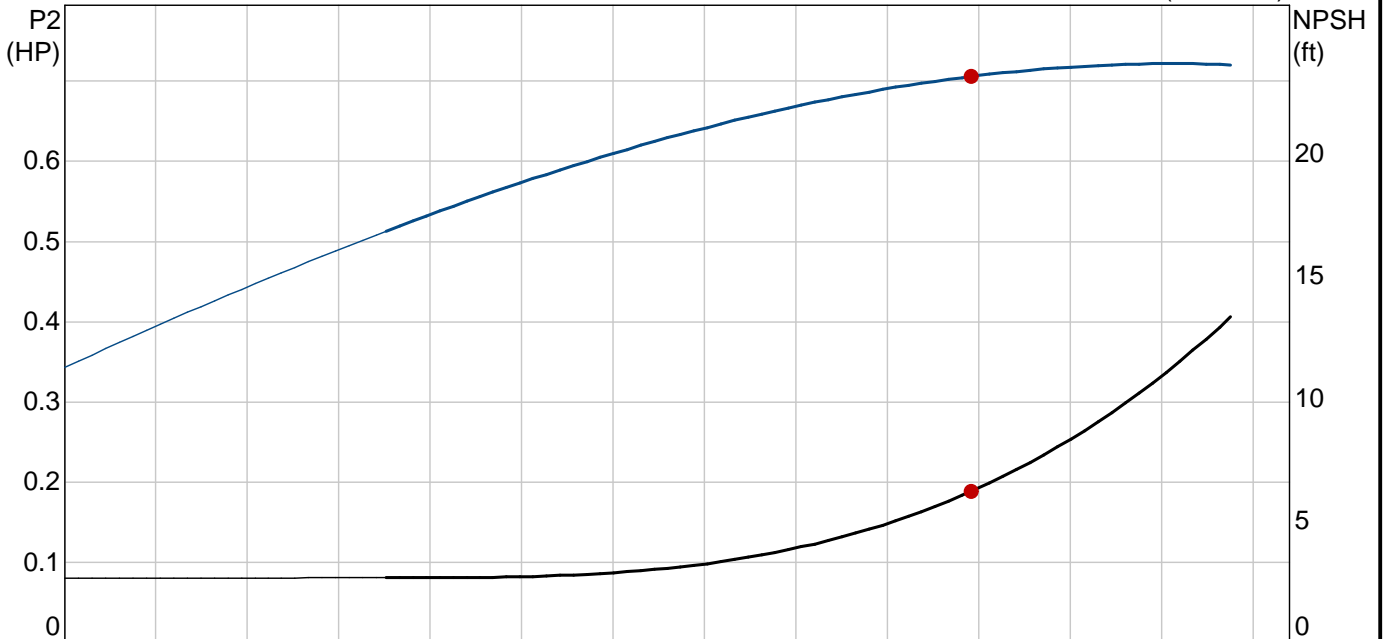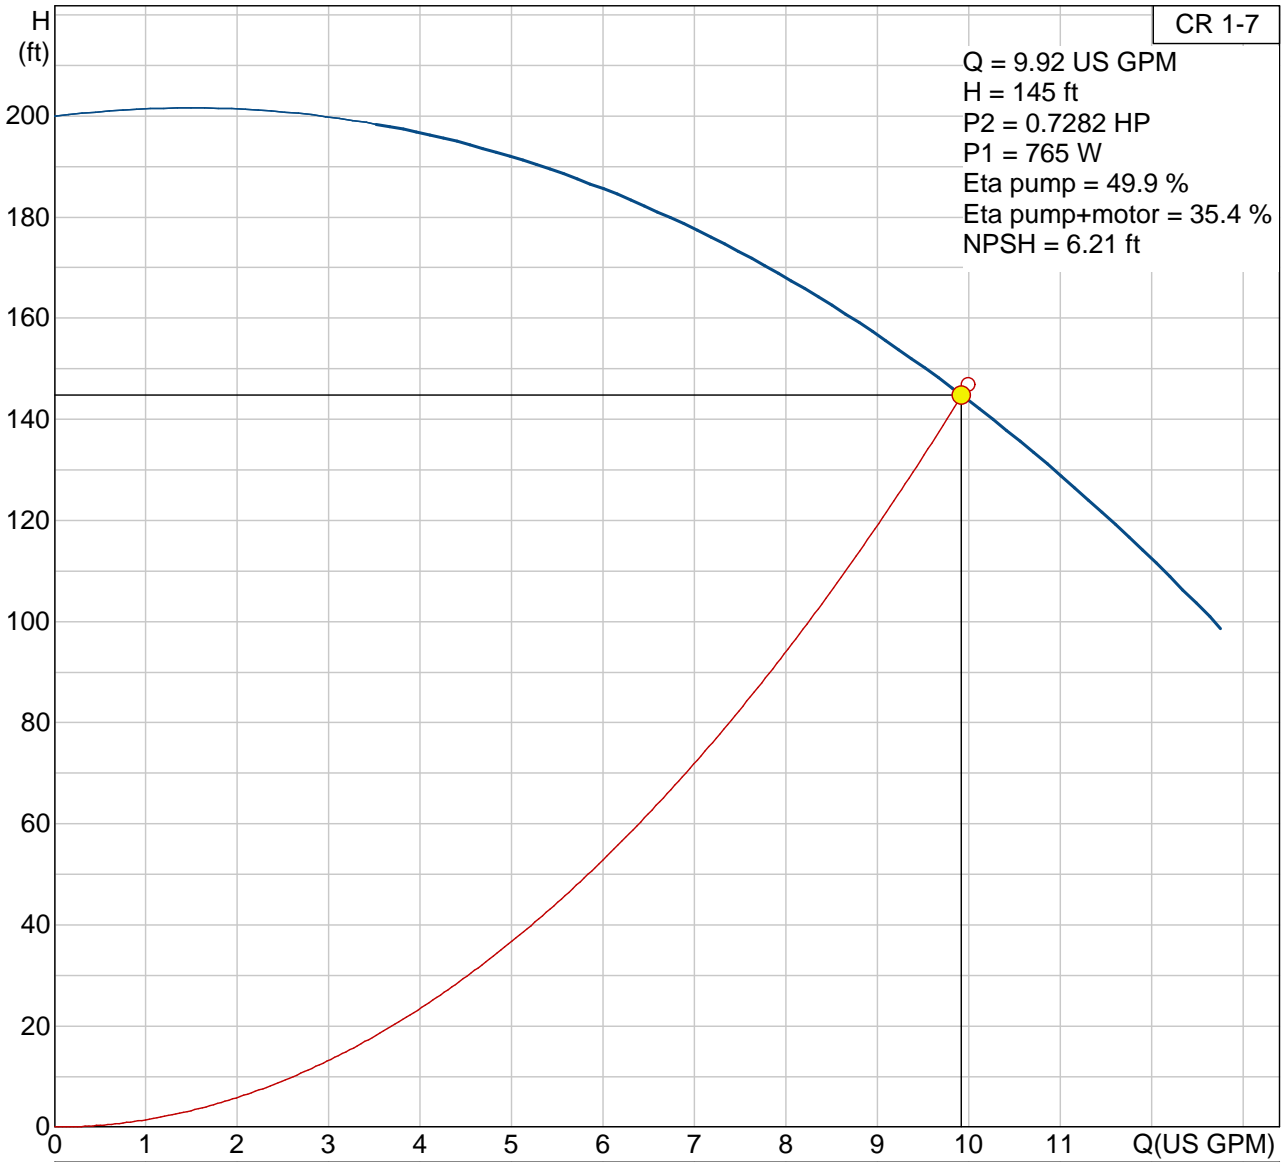

96082121 CR 1-7

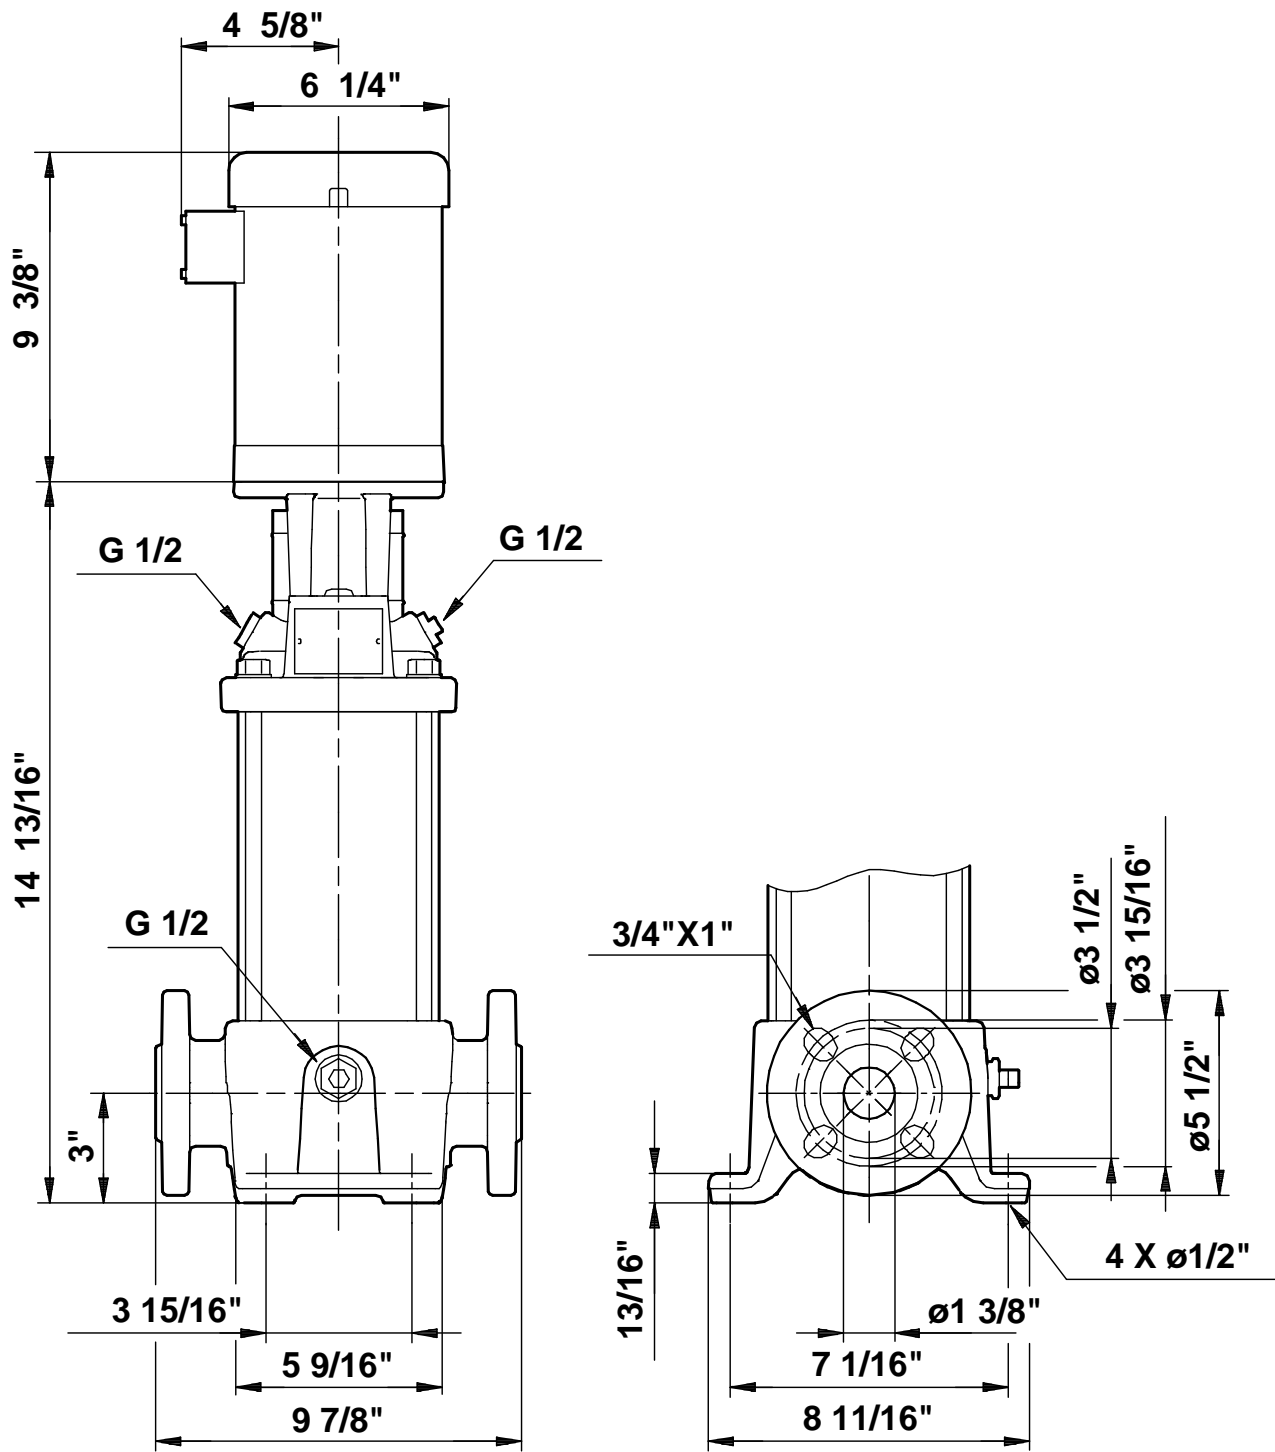

Note! All units are in [mm] unless others are stated.